

bendy packer

Our HD Bendy Packer are dimensionally stable and highly bendable and enable an innovative rehabilitation without cross section constriction in pipe bends.

Advantage:

- optimal extension (radial and axial blow performance)
- bowing perfect without bends
- ideal push behavior to assimilate with conventional ECR-glass fiber mat
- suitable for all pipe materials (KG/stoneware/SML)
- small packer diameter for efficient and economical working



Rohrsanierungspacker

- Mechanisch-physikalische Eigenschaften
- Berstdruckprüfung
- Wirkungsweise geprüft

www.tuev-sued.de/fik



DN 40 - 250




45°-180°



up to 3 dimensions

our portfolio:

40 | 50 | 70 | 70-100 | 100 | 100-125 | 100-150 | 125-200 | 150-200 | 150-250

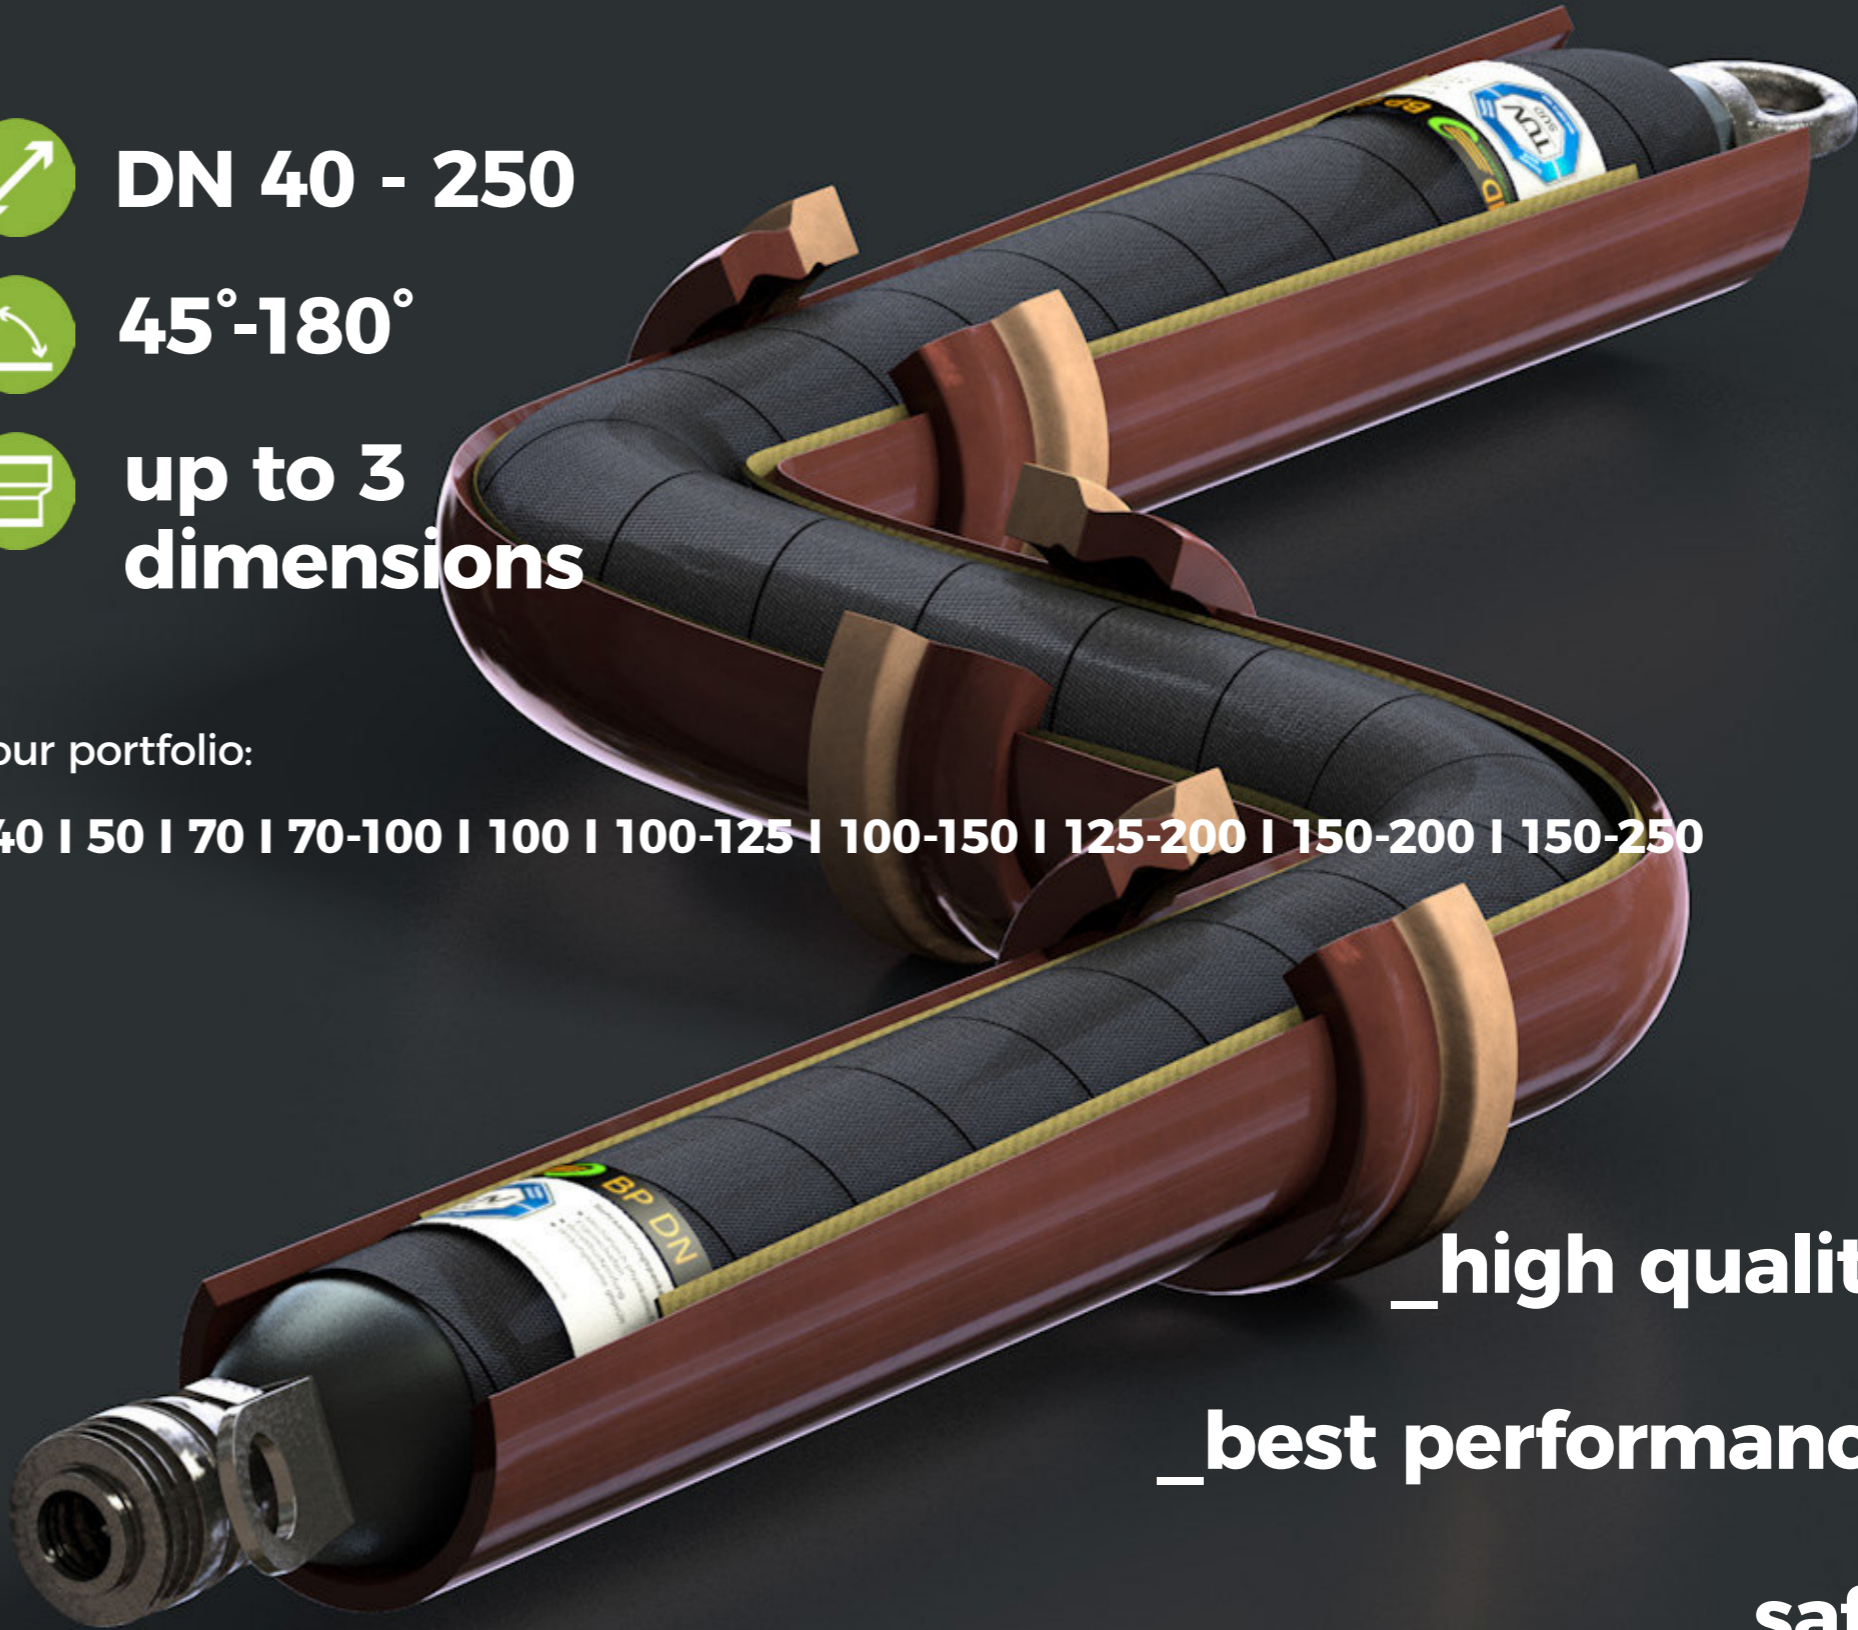

_high quality

_best performance


_safe

bendy packer

New

Model	description	dia- meter	patch size
BP 40	HD bendy packer NW 40 mm, length 35 cm	22 mm	20 cm
BP 50	HD bendy packer NW 50 mm, length 35 cm	30 mm	25 cm
BP 70	HD bendy packer NW 70 mm, length 55 cm	35 mm	40 cm
BP 70100	HD bendy packer NW 70-100 mm, length 80 cm	42 mm	60 cm
BP 100 short	HD bendy packer NW 100 mm, length 60 cm	50 mm	40 cm
BP 100	HD bendy packer NW 100 mm, length 100 cm	50 mm	85 cm
BP 100 long	HD bendy packer NW 100 mm, length 140 cm	50 mm	130 cm
BP 100125 short	HD bendy packer NW 100-125 mm, length 70 cm	60 mm	50 cm
BP 100125	HD bendy packer NW 100-125 mm, length 110 cm	60 mm	90 cm
BP 100125 long	HD bendy packer NW 100-125 mm, length 145 cm	60 mm	130 cm
BP 100150	HD bendy packer NW 100-150 mm, length 110 cm	64 mm	85 cm
BP 125200	HD bendy packer NW 125-200 mm, length 110 cm	80 mm	90 cm
BP 150250	HD bendy packer NW 150-250 mm, length 130 cm	95 mm	100 cm

New

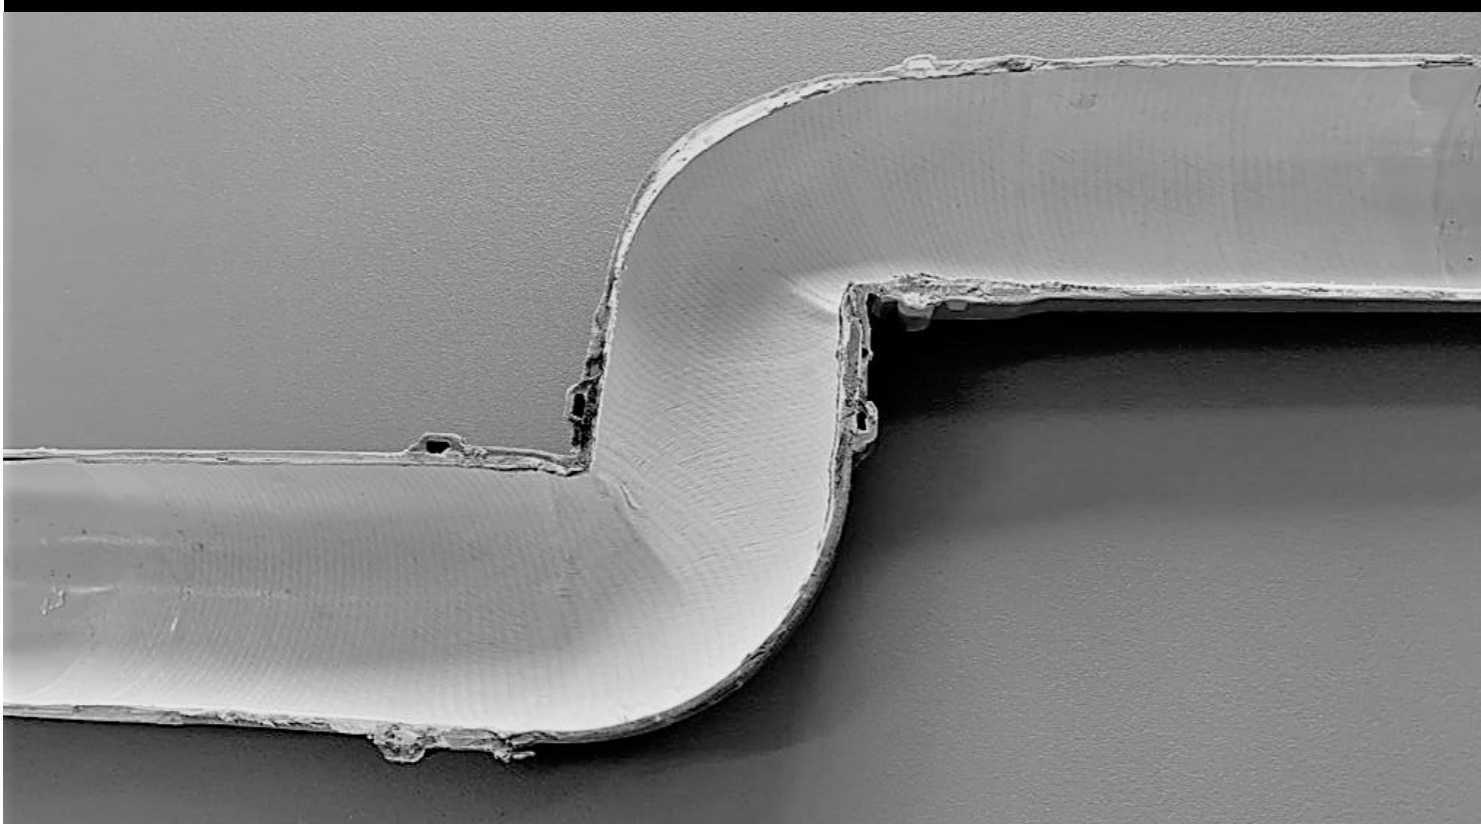

WE RECOMMEND:

FLEX-ADAPTER



AIR-PUSH-RODS STANDARD OR 6-EDGED

